


Ultra Thin 90MM Powerwall Battery-PWG3



Features

- Scalable battery design for easy expansion, Max. 16pcs in parallel
- BYD blade lithium cell more safety, longer life cycle and more esable energy, upto to more than 10 years working life
- Stylish, ultra-thin Easy connection saving installation time and cost
- Compatible to residential 48V hybrid inverter, and off grid inverter compatible with CAN / RS485 communication interface matching with leading inverter brands
- Villa, Household, farm, base station, field power supply

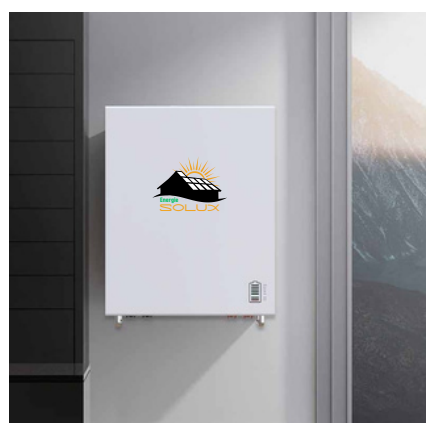

High cycle life
>8000 cycles @80% DoD for effectively lower total of ownership cost



Quickly recharge
Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



Longer service life
Low maintenance batteries with stable chemistry.



Extreme heat tolerance
Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +45°C.



Built in circuit protection
Battery Management System (BMS) is incorporated against abuse.



Lightweight
Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.



Better storage
Up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



Function
Support parallel operation

Ultra Thin 90MM Slimline Powerwall Battery-PWG3

Specifications

Model	ZECO-15050BL- PWG3	ZECO-150100BL- PWG3	Remark
Nominal energy	5120wh	10240wh	Standarf charging and discharging mode test
Series parallel connection	16 groups in parallel	16 units in 2 parallels	16S1P
Nominal capacity	100Ah	200Ah	Standard charging and discharging mode tset
Nominal voltage	51.2V	51.2V	/
Operating voltage range	40~58.4V	40~58.4V	Temperature range :-20~65°C
Operating temperature (charging)	0~65°C ≤90%ROH	0~55°C ≤90%ROH	
Operating temperature (Discharging)	-20~65°C ≤90%ROH	-20~60°C ≤90%ROH	
Standard charging	Constant current charging: 50A Charging voltage: 58.4A Cut off current: 5A	Constant current charging: 100A Charging voltage: 58.4A Cut off current: 10A	Maximum unit voltage 3.65V
Maximum continuous charging current	Constant current charging: 100A Charging voltage: 58.4A Cut off current: 5A	Constant current charging: 200A Charging voltage: 58.4A Cut off current: 10A	Maximum unit voltage 3.65V
Standard charging	Constant current charging: 50A Cut off voltage: 40V	Constant current charging: 100A Cut off voltage: 40V	T ≥0°C Minimum monomer voltage 2.5V
Maximum continuous discharge current	Constant current charging: 50A Cut off voltage: 40V	Constant current charging: 200A Cut off voltage: 40V	T ≥0°C Minimum monomer voltage 2.5V
Storage temperature	-20~65°C	Constant current charging: 200A Cut off voltage: 40V -20~65°C	Storage environment humidity≤95%ROH, no condensation
Cycle life	The capacity attenuates to 80AH and the number of cycles ≥6000	The capacity attenuates to 160AH and the number of cycles ≥3000	90% DOD, @25±2°C, standard charging and discharging mode
Monthly self discharge	≥3.5% Per month	≥2% Per month	After three months shipment, the battery will be charged to 40% SOC and stored at @ 25.2°C
Monitoring communication	RS232/RS485/CAN	RS232/RS485/CAN	
Balanced approach	Passive equalization	Passive equalization	
Shipping capatity	SOC 30~70% (TBD)	SOC 30~70% (TBD)	SOC 30~70% (TBD)
Gross Weight	54Kg	105Kg	
Net Weight	48±2Kg	95±2Kg	
Product Size	(670*540*90) ±1mm	(700*980*100) ±2mm	
Package Size	829*649*174mm	1223*816*189mm	